LED FLOOD LIGHT SERIES



Applicable scope


Used in the park ,bar, hotel and office building exterior wall, floor.
light, round column, square, garden, trees, roads and other outdoor lighting.

Baem :120° Life span :>50000Hrs Color temperature :3000-6500K


SSFL150


SSFL 200


SSFL 300


SSFL 400

Led Flood Light Conventional Technical Parameters

Model	Power	Working voltage	Protection grade	Chip	Luminous	LED color
SSFL150	150W	AC85-265V	IP65	COB/SMD	90-100Lm/w	R/Y/B/G/P/W/WW/RGB
SSFL 200	200W	AC85-265V	IP65	COB/SMD	90-100Lm/w	R/Y/B/G/P/W/WW/RGB
SSFL 300	300W	AC85-265V	IP65	COB/SMD	90-100Lm/w	R/Y/B/G/P/W/WW/RGB
SSFL 400	400W	AC85-265V	IP65	COB/SMD	90-100Lm/w	R/Y/B/G/P/W/WW/RGB

LED FLOOD LIGHT SERIES



Advantage

The lamp body is small, easy to hide or install
Non thermal radiation. beneficial to protect objects
Long life, luminous time of up to 50000 hours.

Baem :120° Life span :>50000Hrs Color temperature :3000-6500K




SSFLSMD30 | SSFLSMD50 | SSFLSMD100 | SSFLSMD150 | SSFLSMD200

Led Flood Light Conventional Technical Parameters

Model	Power	Working voltage	Protection grade	Lamp size	Luminous	LED color
SSFLSMD30	30W	AC85-265V	Ip65	225x220xH50mm	90-100Lm/w	W/WW
SSFLSMD50	50W	AC85-265V	Ip65	285x270xH65mm	90-100Lm/w	W/WW
SSFLSMD100	100W	AC85-265V	Ip65	290x335xH80mm	90-100Lm/w	W/WW
SSFLSMD150	150W	AC85-265V	Ip65	335x315xH100mm	90-100Lm/w	W/WW
SSFLSMD200	200W	AC85-265V	Ip65	375x360xH130mm	90-100Lm/w	W/WW

LED FLOOD LIGHT SERIES

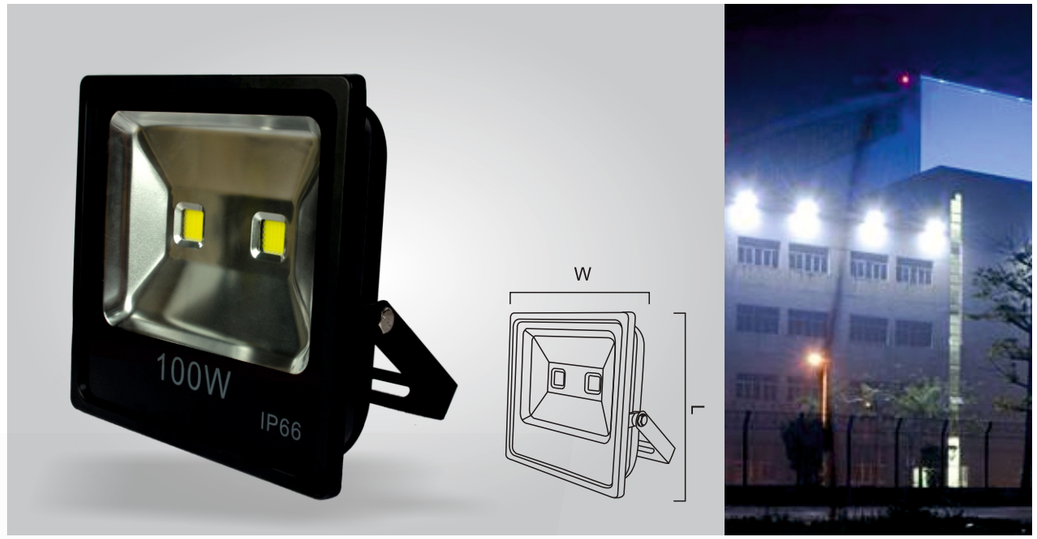

Applicable scope

Used in the park , bar, hotel and office building exterior wall, floor.
light, round column square garden trees, roads and other outdoor lighting.

Baem :120° Life span :>50000Hrs Color temperature :3000-6500K



SSFL1-20 | SSFL1-30 | SSFL1-50 | SSFL1-100 | LUKFB150

Led Flood Light Conventional Technical Parameters

Model	Power	Working voltage	Protection grade	Lamp size	Luminous	LED color
SSFL1-20	20W	AC85-265V	IP66	155x185xH50mm	90-100Lm/w	R/Y/B/G/P/W/WW/RGB
SSFL1-30	30W	AC85-265V	IP66	180x225xH55mm	90-100Lm/w	R/Y/B/G/P/W/WW/RGB
SSFL1-50	50W	AC85-265V	IP66	240x280xH65mm	90-100Lm/w	R/Y/B/G/P/W/WW/RGB
SSFL1-100	100W	AC85-265V	IP66	285x330xH80mm	90-100Lm/w	R/Y/B/G/P/W/WW/RGB
SSFL1-150	150W	AC85-265V	IP66	340x320xH95mm	90-100Lm/w	R/Y/B/G/P/W/WW/RGB
SSFL1-200	200W	AC85-265V	IP66	375x375xH120mm	90-100Lm/w	R/Y/B/G/P/W/WW/RGB

LED PANEL LIGHT



Product Features

Panel lights with light-emitting uniform reflective panel and sealed,
made with efficient light guide plate , and aluminum materials.
Apply to hotels, bars, restaurants, cafes, home, interior, decoration, and other indoor lighting
Glow even higher illumination.



SSPNL3R | SSPNL6R | SSPNL9R | SSPNL3S | SSPNL6S | SSPNL9S

Led Panel Light Conventional Technical Parameters

Model	Power	Working voltage	Lamp size	Opening	Luminous	LED color
SSPNL3R	3W	AC85-265V	Ø&.kk &.v&.kk	Ø$%kk $%v$%kk	60-85Lm/w	W/WW
SSPNL6R	6W	AC85-265V	Ø/ .kk / .v/ .kk	Ø/.#kk /.#v/.#kk	60-85Lm/w	W/WW
SSPNL9R	9W	AC85-265V	Ø/"$kk /"$v/"$kk	Ø/!#kk /!#v/!#kk	60-85Lm/w	W/WW
SSPNL12R	12W	AC85-265V	Ø/%"kk /%"v/%"kk	Ø/##kk /##v/##kk	60-85Lm/w	W/WW
SSPNL15R	15W	AC85-265V	Ø ..kk ..v ..kk	Ø/&.kk /&.v/&.kk	60-85Lm/w	W/WW
SSPNL18R	18W	AC85-265V	Ø #kk #v #kk	Ø .#kk .#v .#kk	60-85Lm/w	W/WW
SSPNL24R	24W	AC85-265V	Ø!..kk !..v!..kk	Ø &.kk &.v &.kk	60-85Lm/w	W/WW
SSPNL30R	30W	AC85-265V	Ø!..kk !..v!..kk	Ø &.kk &.v &.kk	60-85Lm/w	W/WW

LED PANEL LIGHT



Product Features

Panel lights with light-emitting uniform reflective panel and sealed,
made with efficient light guide plate , and aluminum materials.
Apply to hotels, bars, restaurants, cafes, home, interior, decoration, and other indoor lighting
Glow even higher illumination.



SSPNL6060 | SSPNL3060 | SSPNL30120

Led Panel Light Conventional Technical Parameters

Model	Power	Working voltage	Service life	Lamp size	Luminous	LED color
SSPNL3060	18/24W	AC85-265V	50000H	300x600mm	60-85Lm/w	W/WW
SSPNL6060	36/40/48/60W	AC85-265V	50000H	600x600mm	60-85Lm/w	W/WW
SSPNL30120	36/40/48/60W	AC85-265V	50000H	300x1200mm	60-85Lm/w	W/WW

LED PANEL LIGHT



Product Features

Panel lights with light-emitting uniform reflective panel and sealed,
made with efficient light guide plate , and aluminum materials.
Apply to hotels, bars, restaurants, cafes, home, interior, decoration, and other indoor lighting
Glow even higher illumination.



SSSP6R | SSSP12R | SSSP18R | SSSP6S | SSSP12S | SSSP18S

Led Panel Light Conventional Technical Parameters

Model	Power	Working voltage	Lamp size	Service life	Luminous	LED color
SSSP6R	6W	AC85-265V	Ø120v″. k k	50000H	60-85Lm/w	W/WW
SSSP12R	12W	AC85-265V	Ø170v″. k k	50000H	60-85Lm/w	W/WW
SSSP18R	18W	AC85-265V	Ø225v″. k k	50000H	60-85Lm/w	W/WW
SSSP24R	24W	AC85-265V	Ø300v″. k k	50000H	60-85Lm/w	W/WW
SSSP6S	6W	AC85-265V	120v/ . v″. k k	50000H	60-85Lm/w	W/WW
SSSP12S	12W	AC85-265V	170v/%. v″. k k	50000H	60-85Lm/w	W/WW
SSSP18S	18W	AC85-265V	225v #v″. k k	50000H	60-85Lm/w	W/WW
SSSP24S	24W	AC85-265V	300v!. . v″. k k	50000H	60-85Lm/w	W/WW

LED STRIP LIGHT SERIES



Led Strip Light Technical Parameters

Model	(CT)	Working voltage	Power	LED Qty	Radiation Angle	Ingress Protection	Packaging
SSRP2835-60	3000~6500K	220V	②#,#? -7	60pcs	120°	IP65	100m/Roll
SSRP2835-120	3000~6500K	220V	②','? -7	120pcs	120°	IP65	100m/Roll
SSRP2835-180	3000~6500K	220V	② ″,!? -7	180pcs	120°	IP65	50m/Roll
SSRP5050-RGB	RGB	220V	②#,#? -7	60pcs	120°	IP65	100m/Roll
SSRP2835-60	3000~6500K	220V	② #,#? -7	60pcs	120°	IP65	100m/Roll

LED COB DOWNLIGHT



. _D<p>_B?jsk>Ask)) j_qq
+ABsD7mJ_e<8?%637+!437
J>efD4msp;<8%0@
%3+8③53
@<_k? Aej8/! §
1mF<p(_;Dmp8③,3
J>=4 B_A③"3 f




Led COB Downlight Conventional Technical Parameters

Model	Power	INCH	Lamp size	Open size	Service life	Luminous
LUKCOB15	5W	3	Ø110vF".kk	Ø87	35000H	90-100Lm
LUKCOB10	10W	4	Ø124vF$.kk	Ø110	35000H	90-100Lm
LUKCOB15	15W	5	Ø170vF%"k k	Ø145	35000H	90-100Lm
LUKCOB20	20W	6	Ø190vF%&k k	Ø165	35000H	90-100Lm
LUKCOB30	30W	8	Ø228vF'.kk	Ø195	35000H	90-100Lm

LED COB DOWNLIGHT



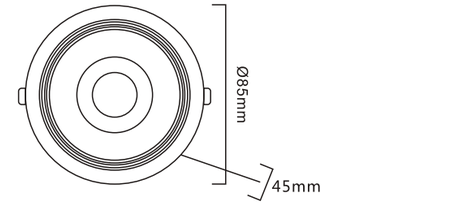

. _D<p>_B?jsk>Ask)) j_qq
+ABsD7mJ_e<8?%637+!437
J>efD4msp;<8%0@
%3+8③53
@<_k? Aej8/! §
1mF<p(_;Dmp8③,3
J>=4 B_A③"3 f



Led COB Downlight Conventional Technical Parameters

Model	Power	INCH	Lamp size	Open size	Service life	Luminous
LUKCOB3A	3W	2	Ø85vF"#k k	Ø65	35000H	90-100Lm
LUKCOB5A	5W	3	Ø1.#F#.kk	Ø85	35000H	90-100Lm
LUKCOB15A	10W	4	Ø130vF"&k k	Ø105	35000H	90-100Lm
LUKCOB20A	15W	5	Ø165vF#.kk	Ø138	35000H	90-100Lm
LUKCOB30A	20W	6	Ø190vF# k k	Ø165	35000H	90-100Lm
LUKCOB40A	30W	8	Ø220vF##k k	Ø198	35000H	90-100Lm