
LED STREET LIGHT SERIES







Scope Of Application

Widely Used In Highway , The Main Road And Branch Road ,road, Park , Square , Park Road , Pedestrian Streets , Parking Lots , Streets , Communities , Factories , Schools , Residential , Garden Road Lighting.



SSST150W



SSST1100W



SSST150W


Led Street lamp Conventional Technical Parameters


Model	Power	Working voltage	Lamp size	Service life	Protection grade	Luminous	Lighting material
SSST150W	50W	AC85-265V	L490xW 215xH75mm	50000H	IP65	100-130Lm	DIE CAST ALUMINUM
SSST160W	50/60W	AC85-265V	L620xW 260xH75mm	50000H	IP65	100-130Lm	
SSST1100W	100/120W	AC85-265V	L720xW 290xH95mm	50000H	IP65	100-130Lm	
SSST1120W	150W	AC85-265V	L890xW 340xH95mm	50000H	IP65	100-130Lm	
SSST1200W	200W	AC85-265V	L1120xW 410xH95mm	50000H	IP65	100-130Lm	

LED STREET LIGHT SERIES









Scope Of Application

Widely Used In Highway , The Main Road And Branch Road ,road, Park , Square , Park Road , Pedestrian Streets , Parking Lots , Streets , Communities , Factories , Schools , Residential , Garden Road Lighting.



SSST250W



SSST2100W



SSST2150W

Led Street lamp Conventional Technical Parameters

Model	Power	Working voltage	Lamp size	Service life	Protection grade	Luminous	Lighting material
SSST250W	50/60W	AC85-265V	L580xW 230xH90mm	50000H	IP65	100-130Lm	DIE CAST ALUMINUM
SSST2100W	100W	AC85-265V	L680xW 265xH90mm	50000H	IP65	100-130Lm	
SSST2150W	150/180W	AC85-265V	L810xW 265xH90mm	50000H	IP65	100-130Lm	
SSST2200W	160/200W	AC85-265V	L980xW 305xH90mm	50000H	IP65	100-130Lm	

LED STREET LIGHT SERIES





Scope Of Application

Widely Used In Highway , The Main Road And Branch Road ,road, Park , Square , Park Road , Pedestrian Streets , Parking Lots , Streets , Communities , Factories , Schools , Residential , Garden Road Lighting.



SSST3-50W SSST3-100W SSST3-150W SSST3-200W

Led Street lamp Conventional Technical Parameters

Model	Power	Working voltage	Lamp size	Service life	Protection grade	Luminous	Lighting material
SSST3-50W	50W	AC85-265V	350*150MM	50000H	IP65	100-130Lm	DIE CAST ALUMINUM
SSST3-100W	100W	AC85-265V	600*205MM	50000H	IP65	100-130Lm	
SSST3-150W	150W	AC85-265V	680*220MM	50000H	IP65	100-130Lm	
SSST3-200W	200W	AC85-265V	800*240MM	50000H	IP65	100-130Lm	
SSST3-250W	250W	AC85-265V	920*265MM	50000H	IP65	100-130Lm	

LED STREET LIGHT SERIES





Scope Of Application

Widely Used In Highway , The Main Road And Branch Road ,road, Park , Square , Park Road , Pedestrian Streets , Parking Lots , Streets , Communities , Factories , Schools , Residential , Garden Road Lighting.


Led Street lamp Conventional Technical Parameters

Model	Power	Working voltage	Lamp size	Service life	Protection grade	Luminous	Lighting material
SSST5-50W	50W	AC85-265V	L398*W139*H50MM	50000H	IP65	100-130Lm	DIE CAST ALUMINUM
SSST5-100W	100W	AC85-265V	L525*W183*H52MM	50000H	IP65	100-130Lm	
SSST5-150W	150W	AC85-265V	L625*W188*H50MM	50000H	IP65	100-130Lm	
SSST5-200W	200W	AC85-265V	L650*W220*H50MM	50000H	IP65	100-130Lm	

LED H IGHBAY







Product Features

The lamp body is made of high quality aluminum , anodic oxidation , better cooling performance.
Imported high brightness single high power LED light source , it has high thermal conductivity , low luminous decay , pure light color , no heavy shade.

Led Highbay 0Conventional Technical Parameters


Model	Power	Working voltage	Lamp size	Service life	Protection grade	Luminous	Lighting material
SSHB120W	120W	AC85-265V	Ø500xH75㎜	50000H	Ip60	100-120Lm	ALUMINUM
SSHB150W	150W	AC85-265V	Ø500xH75㎜	50000H	Ip60	100-120Lm	ALUMINUM
SSHB18W	180W	AC85-265V	Ø500xH75㎜	50000H	Ip60	100-120Lm	ALUMINUM
SSHB210W	210W	AC85-265V	Ø500xH75㎜	50000H	Ip60	100-120Lm	ALUMINUM
SSHB200W	200W	AC85-265V	Ø500xH75㎜	50000H	Ip60	100-120Lm	ALUMINUM
SSHB-01	30W	AC85-265V	Ø500xH75㎜	50000H	Ip60	100-120Lm	ALUMINUM
SSHB-02	50W	AC85-265V	Ø500xH75㎜	50000H	Ip60	100-120Lm	ALUMINUM
SSHB-03	80W	AC85-265V	Ø500xH75㎜	50000H	Ip60	100-120Lm	ALUMINUM
SSHB-04	100W	AC85-265V	Ø500xH75㎜	50000H	Ip60	100-120Lm	ALUMINUM

LED T8 TUBE SERIES



Led T8-Tube Conventional Technical Parameters

Light source	material	Lamp body size	Outer box size	Color Temperature	Box number
20W/1700lm	Glass	1.2m	124.5x17.5x35㎝	6500K/4000K	50pcs
15W/1300lm	Glass	0.9m	94.5x17.5x35㎝	6500K/4000K	50pcs
10W/800lm	Glass	0.6m	64.5x17.5x35㎝	6500K/4000K	50pcs

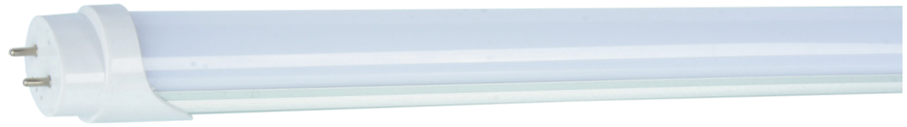

Led T8-Tube Conventional Technical Parameters

Light source	material	Lamp body size	Outer box size	Color Temperature	Box number
24W/2300lm	Glass	1.2m	124.5x17.5x35㎝	6500K/4000K	50pcs
20W/2000lm	Glass	0.9m	94.5x17.5x35㎝	6500K/4000K	50pcs
15W/1400lm	Glass	0.6m	64.5x17.5x35㎝	6500K/4000K	50pcs



Led T8-Tube Conventional Technical Parameters

Light source	material	Lamp body size	Outer box size	Color Temperature	Box number
28W/2800lm	Glass	1.2m	124.5x17.5x35㎝	6500K/4000K	50pcs
20W/2000lm	Glass	0.9m	94.5x17.5x35㎝	6500K/4000K	50pcs
15W/1500lm	Glass	0.6m	64.5x17.5x35㎝	6500K/4000K	50pcs

LED METAL BRACKET SERIES





Led Metal bracket Conventional Technical Parameters

Light source	material	Lamp body size	Outer box size	Color Temperature	Box number
1*20W/1.2m	Tin	122x35x15cm	124.5x21x17cm	6500K/4000K	50pcs
1*15W/0.9m	Tin	92x35x15cm	94x21x17cm	6500K/4000K	50pcs
1*10W/0.6m	Tin	62x35x15cm	64x21x17cm	6500K/4000K	50pcs
2*20W/1.2m	Tin	122x43x16cm	124.5x23x11cm	6500K/4000K	50pcs
2*10W/0.6m	Tin	62.5x42x16cm	64x23x11cm	6500K/4000K	50pcs


LED T5 FIXTURE



Ultra thin lamp

Light source	material	Lamp body size	Outer box size	Color Temperature	Box number
1*20W/1.2m	Aluminum	122x35x15cm	124.5x21x17cm	6500K/4000K	50pcs
1*15W/0.9m	Aluminum	92x35x15cm	94x21x17cm	6500K/4000K	50pcs
1*10W/0.6m	Aluminum	62x35x15cm	64x21x17cm	6500K/4000K	50pcs

T8 WATER PROOF FIXTURE

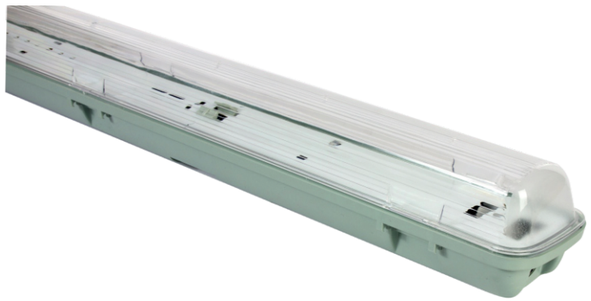





A5 three proofings lamp

Light source	material	Lamp body size	Outer box size	Color Temperature	Box number
1*28W/1.2m	ABS+PC	1250x70x75mm	129x27x16.5cm	6500K/4000K	8pcs
2*20W/1.2m	ABS+PC	1250x100x75mm	129x27x25cm	6500K/4000K	8pcs

Stainless steel hangs Taiwan + stainless steel buckle

LED FILAMENT BULB





Introduction&Applications

The filament bulb adopts quality special optical glass and sapphire bracket.

360° beam angle with higher luminance and better performance.

Using light gas convection cooling, long life.

Livingroom, chandelier, cyristal lamp, bedroom, etc.

Baem :-30°+40°　　Life span :35,000-50,000Hrs　　Color temperature :3000K/4000K/6500K



SSF1



SSF2



SSF3



SSF4

Led Filament bulb Conventional Technical Parameters

Model	Input	Lumen	Power	CRI	SHAPE	Beam angle	LED Filament
SSF1	200-240V AC50/60Hz	2W/4W	220lm	Ra≥80	C30/C35	360°	sapphire/ceramics
SSF2	200-240V AC50/60Hz	2W/4W	220lm	Ra≥80	C30/C35	360°	sapphire/ceramics
SSF3	200-240V AC50/60Hz	8W/9W	420lm	Ra≥80	A60/G45	360°	sapphire/ceramics
SSF4	200-240V AC50/60Hz	8W/9W	820lm	Ra≥80	A60	360°	sapphire/ceramics

LED BULB



Led Bulb Conventional Technical Parameters

Model	Power	Material	size (mm)	Luminous	CHIPS	Leds (pcs)	Carton size (cm)	Packing Pcs/Carton
SSBL13W	3W	Plastic plus Aluminum	Ø45x80	80-100Lm	2835	4	24x24x38.7	100
SSBL15W	5W	Plastic plus Aluminum	Ø50x95	80-100Lm	2835	6	26.5x26.5x41.5	100
SSBL17W	7W	Plastic plus Aluminum	Ø60x108	80-100Lm	2835	8	29x29x46.3	100
SSBL19W	9W	Plastic plus Aluminum	Ø60x108	80-100Lm	2835	10	31.5x31.5x49.1	50
SSBL112W	12W	Plastic plus Aluminum	Ø60x117	80-100Lm	2835	14	34x34x51.5	50
SSBL115W	15W	Plastic plus Aluminum	Ø70x123	80-100Lm	2835	16	51x51x36	50



Led Bulb Conventional Technical Parameters

Model	Power	Material	size (mm)	Luminous	CHIPS	Leds (pcs)	Carton size (cm)	Packing Pcs/Carton
SSBL27W	7W	Plastic plus Aluminum	Ø50	65-80Lm	2835	8	26.5x26.5x41.5	50
SSBL212W	12W	Plastic plus Aluminum	Ø60	65-80Lm	2835	14	33x33x51	50
SSBL215W	15W	Plastic plus Aluminum	Ø70	65-80Lm	2835	16	38x38x57	50
SSBL218W	18W	Plastic plus Aluminum	Ø80	65-80Lm	2835	20	44x44x59	30
SSBL225W	25W	Plastic plus Aluminum	Ø100	65-80Lm	2835	30	46x46x36	20
SSBL235W	35W	Plastic plus Aluminum	Ø120	65-80Lm	2835	40	51x51x36	20

LED 2835U BLUB



Led 2835U Bulb Conventional Technical Parameters

Model		color	size (mm)	Lamp holder	Luminous	CHIPS	voltage	Carton size (cm)	Packing Pcs/Carton
SS-2U	3W	3000/6500	105X38	E14/E27/B22	270Lm	2835	95-265V	41.5x21.5x26	50
SS-3U	5W	3000/6500	110X43	E14/E27/B22	450Lm	2835	95-265V	44x44x16	50
SS-3U	7W	3000/6500	130X43	E14/E27/B22	630Lm	2835	95-265V	44x44x16	50
SS-3U	9W	3000/6500	140X43	E14/E27/B22	810Lm	2835	95-265V	44x44x16	30
SS-3U	12W	3000/6500	175X52	E27/B22	1080Lm	2835	95-265V	57x29x20	20
SS-4U	16W	3000/6500	180X59	E27/B22	1440Lm	2835	95-265V	65x33x20.5	20
SS-4U	24W	3000/6500	225X73	E27/B22	2160Lm	2835	95-265V	81x41x29	20
SS-4U	32W	3000/6500	260X73	E27/B22	2880Lm	2835	95-265V	81x41x29	20
SS-5U	40W	3000/6500	278X81	E27/B22	3600Lm	2835	95-265V	89x44.5x30	20

LED BULB



Led Bulb Conventional Technical Parameters

Model	Power	size (mm)	Material	Luminous	CHIPS	LEDS (PCS)	Carton size (cm)	Packing Pcs/Carton
SSC3	3W	Ø45	PP	65-80Lm	DIP	3PCS	32x28x25	100

LED G9/G4 SERIES



LUKG53A

Power	1.2W
Lumen	90Lm
Voltage	AC/DC 12V
CCT	2700-6500K
PF	>0.5
LED QTY	24pcs
CRI	Ra>80
LED Type	SMD 3014
Base	G4
Size	9.5x34.5mm
Weight	4g



LUKG53B

Power	2.4W
Lumen	180Lm
Voltage	AC/DC 12V
CCT	2700-6500K
PF	>0.5
LED QTY	57pcs
CRI	Ra>80
LED Type	SMD 3014
Base	G4
Size	15x43mm
Weight	8g



LUKG53C

Power	1W
Lumen	90Lm
Voltage	AC/DC 12V
CCT	2700-6500K
PF	>0.5
LED QTY	12pcs
CRI	Ra>80
LED Type	SMD 2835
Base	G4
Size	12x32mm
Weight	5g



LUKG9A

Power	2.6W
Lumen	170Lm
Voltage	AC 95-265V
CCT	2700-6500K
PF	>0.5
LED QTY	64pcs
CRI	Ra>80
LED Type	SMD 3014
Base	G9
Size	14x50mm
Weight	10g

LED SPOT LAMP SERIES



MR16

Led Spot lamp Conventional Technical Parameters

Power:3W
Lumen:240LM
CCT:2700K-6500K
Product Size:D50xH52mm
CRI:>80
Voltage:220-240V/AC DC 12V
Beam angle:24/120
Housing Material:Glass
Base:GU10/GUS.3

Power:5W
Lumen:350LM
CCT:2700K-6500K
Product Size:D50xH54mm
CRI:>80
Voltage:220-240V
Beam angle:38/60
Housing Material:Glass
Base:GU10/GUS.3